


Paramount Safe Grade 0: Model P159

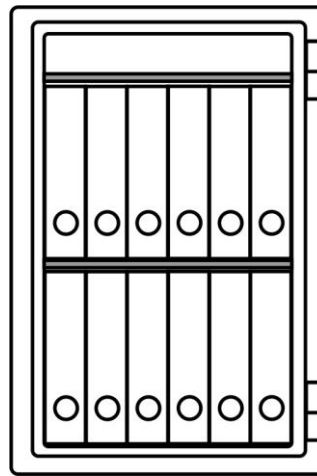

A4 Folder Capacity

When Security is Paramount

Looking for an elegant, and secure storage solution suitable for use in homes and commercial environments? The Paramount Safe is designed to protect your valuables against Burglary and Fire hazards. Designed and engineered to the very latest standards, the range combines stylish looks with outstanding levels of security. The collection has been designed to complement all environments whether it is modern or classic. An efficient and modern storage system for your cash and documents.

The Paramount range is built under the Integrated Management System (IMS) Certification, which encompasses the ISO 9001:2000, ISO 14001, and OHSAS : 18001 (Operational Health and Safety Assessment Series) Certifications - thus committing delivery of standard products, under pre-defined quality and safety procedures which are being continually monitored and assessed by Internal & External audits.

Godrej Security, the Paramount Manufacturer, is also renowned globally for its ethical Business practices and its concern for Environmental and Social welfare.

Features:

- Security Grade 0 equivalent.
- Fire resistance: 30 minutes: Factory rating.
- Contemporary Design and Construction.
- 3-way bolt-work & locking mechanism protected by Drill Resistant Plates and Glass Relocker.
- Certified Locks.
- Supplied with adjustable shelf (2).
- Colour: Cream (RAL9010).
- 24 months parts and labour warranty.
- Commercial Cash Cover: \$20,000.
- Commercial Jewellery Cover: \$40,000.
- Residential Jewellery Cover: \$80,000.



NB: PLEASE CHECK WITH YOUR INSURER TO CONFIRM COVER VALUES BEFORE PURCHASING

As our policy is one of consistent improvement we reserve the right to alter any of the above specifications without notice and without incurring any obligation.

Paramount Safe Grade 0: Model P159

Specifications:

Hanging of Door: Standard Right Hand

Shelf Quantity: 2

Product Rating:

Security: Not tested

Fire: Not tested

Burglary Resistance: Grade 0 equivalent

Fire Resistance: 30 Minutes, Factory

Basic Lock Configurations:

EN1300 Certified Double Bitted Key Lock

Or

Vds Certified Two User Electronic Lock

(Requires Alkaline Duracell Pro or Energizer 9V Battery)

Advanced Lock Options available

Height: 862mm (External), 762mm (Internal)

Width: 557mm (**W**-External), 457mm (**w**-Internal)

Depth: 594mm (**D**-External), 457mm (**d**-Internal)

**Tolerances on Dimensions: as shown or +/- 2mm*

Please add 50mm to external depth dimensions for hinges and handle projection

Door at 90° (OD): 1125mm

Door at 180° (OW): 1054mm

Door Swing Radius (S): 516 mm

Volume: 159 Litres

Weight: 345 Kgs

**Tolerances on Weight: +/- 10%*

Door Construction:

Plate 10mm

Body Construction:



Mild Steel – with reinforced concrete barrier material

Fire Protection Barrier:

Intumescent Expanding Seals on Door and Frame

Fixing:

Base: 1

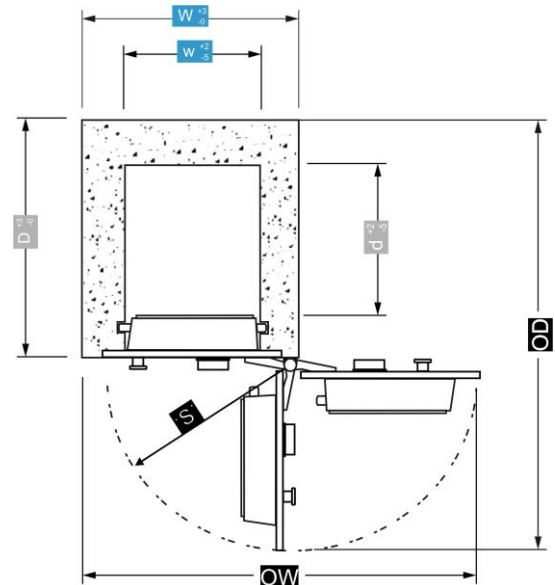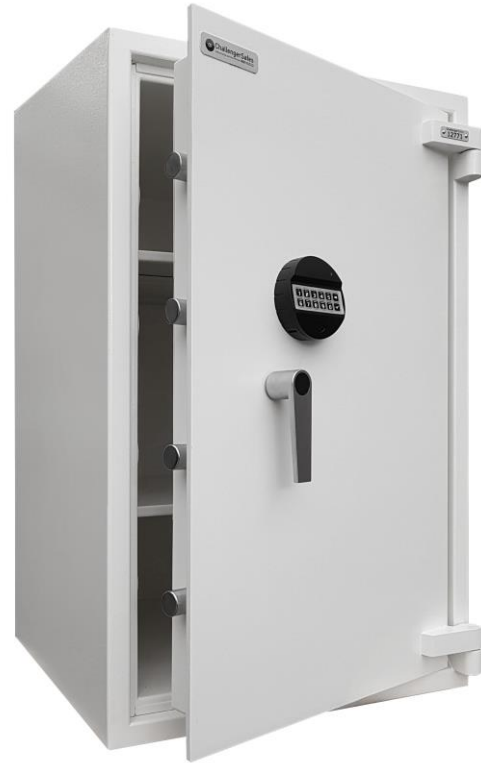

NB: PLEASE CHECK WITH YOUR INSURER TO CONFIRM COVER VALUES BEFORE PURCHASING

As our policy is one of consistent improvement we reserve the right to alter any of the above specifications without notice and without incurring any obligation.